



Mail eyes

Groz-Beckert develops and produces mail eyes in diverse assortment of sizes and designs, ensuring that the perfect solution is available regardless of the requirement.

GROZ-BECKERT

Groz-Beckert KG

Parkweg 2, 72458 Albstadt, Germany
Phone +49 7431 10-0, Fax +49 7431 10-2777
contact-weaving@groz-beckert.com
www.groz-beckert.com

Qualities

Standard Performance (**SP**):
has a hard outer surface that extends deep inside the mail eye

High Performance (**HP**):
offers high surface layer hardness, excellent surface quality and a tough core area



C Mail eyes



Advantage:
High resistance to abrasion

Applications:
• For coarse yarns
• For abrasive yarns

Quality:
• SP

R Mail eyes



Advantages:
• High resistance to adhesion and abrasion
• Improved corrosion and chemical resistance

Applications:
• For medium to fine yarns
• For yarns with corrosive additives
• For corrosive environments

Quality:
• SP
• HP

SR Mail eyes



Advantages:
High resistance to abrasion

Applications:
• For high warp tensions
• For high speed jacquard machines
• For abrasive yarns


Quality:
• SP









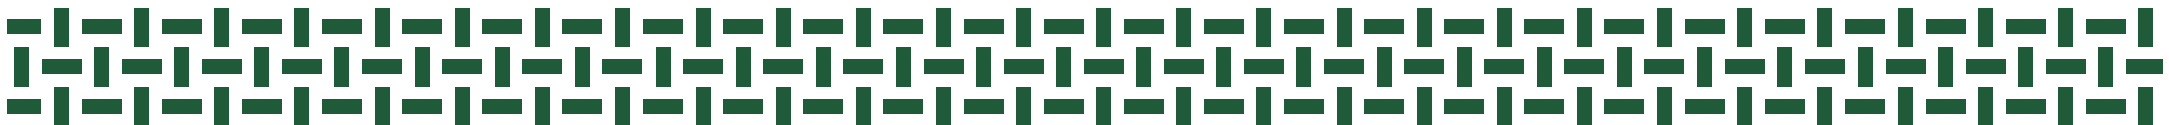












R Mail eyes


















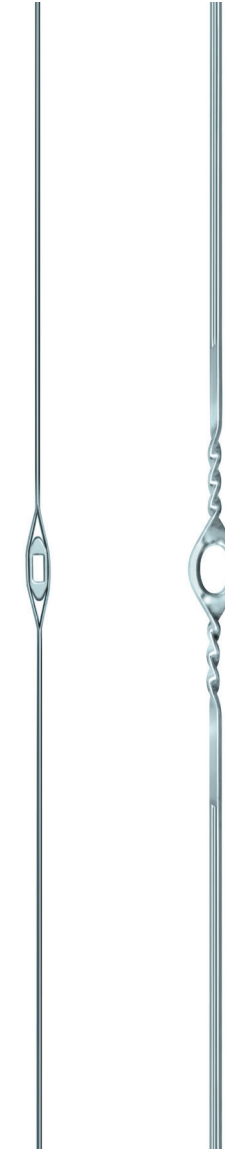
SR Mail eyes



Mail eye – supply range

Type	No.	Thickness in mm	Inside Ø mm
	R 1010	0,3 / 0,4	2,8 x 1,0
	R 1015	0,35 / 0,4 / 0,5	3,2 x 1,4
	R 1020	0,35 / 0,5	3,8 x 1,6
	R 328	0,5 / 0,9	4,3 x 2,4
	R 355	0,55 / 0,8	5,3 x 2,4
	R 380	0,6 / 0,8 / 1,2	5,6 x 2,7
	R 385	0,70 / 1,0	6,2 x 3,4
	R 1080	0,8 / 1,2 / 1,4	6,6 x 3,9
	R 390	1,0 / 1,4	8,0 x 4,2
	R 420	1,0 / 1,4	9,0 x 4,8
	R 450	1,4	10,0 x 6,3
	R 480	1,5	13,5 x 7,4
	R 360	0,4 / 0,55	5,6 x 1,3
	R 370	0,6	6,0 x 1,5
	R 395	1,0	8,3 x 2,5
	R 440	1,0	10,5 x 2,8
	R 8040	1,0 / 1,2	8,0 x 4,0
	R 3012	0,45	3,0 x 1,2
	R 3815	0,5	3,8 x 1,5

Type	No.	Thickness in mm	Inside Ø mm
	R 31/0	0,5	ø 3,1
	R 50/0	0,8 / 1,4	ø 5,0
	R 65/0	1,4	ø 6,5
	R 80/0	1,4	ø 8,0
	R 100/0	1,6	ø 10,0
	SR 312	0,4 / 0,45	3,0 x 1,2
	SR 415	0,45	4,0 x 1,5
	SR 518	0,45	5,0 x 1,8
	C 100	2,2	ø 12,0
	C 110	2,2	5,2 x 1,8
	C 120	2,2	6,0 x 3,0
	C 140	2,2	7,5 x 4,0
	C 150	2,2	10,0 x 6,0
	C 160	2,2	13,5 x 7,5
	C 200	2,2	19,0 x 11,0



Minimal dimensional variation

The depictions provided of our products are not to scale and are intended for illustrative purposes only. Consequently they make no claim to be an accurate representation of the original. ® = Registered trademark of the Groz-Beckert company group. | © = This publication is copyrighted. All rights reserved, in particular the right of duplication, distribution and translation. This publication or any parts thereof may not be reproduced or stored, processed, duplicated or distributed using electronic systems in any form or by any means whatsoever without the express written consent of Groz-Beckert.