SiroLock™ plus – worker and doffer wire

The card clothing for an optimum web quality and reduced fiber fly from the Groz-Beckert InLine card clothing series

GROZ-BECKERT


Groz-Beckert KG

Parkweg 2, 72458 Albstadt, Germany Phone +49 7431 10-0 contact-nonwovens@groz-beckert.com www.groz-beckert.com

The SiroLock[™] plus worker and doffer wire combines collected experience with the new, patented production process for the Groz-Beckert InLine card clothing series. The comprehensive and application-oriented portfolio of the SiroLock[™] plus card clothing reflects the characteristics of the Groz-Beckert InLine card clothing: a reduced rib height of the interlock card clothing and in particular improved strength of delicate card clothing teeth. This enables optimal card clothing geometries with fiber-protecting finish quality.

Compared with the SiroLock[™] card clothing, SiroLock[™] plus offers a more effective fiber take-up, control and hand-over with even the highest throughputs. When carding fine viscose fibers in particular, the new properties are effective in achieving reduced fiber fly. A more even and homogeneous web is achieved.

Groz-Beckert Patent EP 2756119 B1, CN 103890252 B JP 6113731 B2, US 9145625 B2

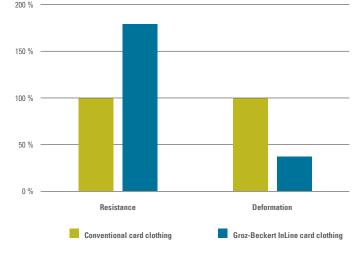

Resistance and deformation of a doffer wire tooth with load

from the side

Benefits:

- Reduced fiber fly and more homogeneous web quality
- High lifetime potential thanks to increased resistance to damage
 Improved fiber protection

GROZ-BECKERT



SiroLock™ plus interlocking



SiroLock™ plus plain rib

Product range/portfolio	PPSI	Fiber fineness	Worker (breast cylinder)	Worker (main cylinder)	Intermediate doffer	Doffer	Application field	
							Application	End product
Groz-Beckert InLine SiroLock™ plus P065/230/40H28 SL+ F8	432	≤ 3.3 dtex		Х	х	Х	Thermal bonding, spunlace	Filter media, hygiene products
Groz-Beckert InLine SiroLock™ plus 2065/250/40H40 SL+ F8	397	≤ 3.3 dtex		Х	Х	Х	Thermal bonding, spunlace	Filter media, hygiene products
Groz-Beckert InLine SiroLock™ plus 2080/250/40H40 SL+ F8	323	≤ 3,3 dtex		Х	Х	Х	Thermal bonding, spunlace	Filter media, hygiene products
Groz-Beckert InLine SiroLock™ plus /30/250/40H40 SL+ F8	304	≤ 3,3 dtex		Х	Х	Х	Thermal bonding, spunlace	Filter media, hygiene products
Groz-Beckert InLine SiroLock™ plus V28/250/40H40 SL+ F8	284	≤ 6,7 dtex		Х	х	Х	Needle punching, thermal bonding, spunlace	Automotive products, filter media, hygiene products
Groz-Beckert InLine SiroLock™ plus /24/250/40H40 SL+ F8	243	≤ 6,7 dtex	Х	Х	Х	Х	Needle punching, thermal bonding	Automotive products, filter media
Groz-Beckert InLine SiroLock™ plus /24/360/40H48 SL+ F8	169	≤ 15 dtex	х	Х	х	Х	Needle punching, thermal bonding, spunlace	Automotive products, hygiene products
Groz-Beckert InLine SiroLock™ plus √20/360/40H48 SL+ F8	141	≤ 15 dtex	Х	Х	Х	Х	Needle punching, thermal bonding	Automotive products, geotextiles, floor coverings
Groz-Beckert InLine SiroLock™ plus V16/420/40H45 SL+ F8	97	≤ 22 dtex		Х	Х	Х	Needle punching	Automotive products, floor coverings